

“ OUR RANGE OF PRODUCTS

- Concrete Admixture
 - Block Jointing Mortar
 - Water Proofing Chemicals
 - Protective Coatings
 - Wall Putty
 - Wall Primer
 - Metal Primer
 - Wood Primer
- Tile / Stone Adhesives
 - Waterproof Tile Grout
 - Epoxy Tile Grout
 - Paver Hardener
 - Paver Shiner
 - Mould Release Agent
 - Floor Hardener
 - Foundation Grout



Manufactured & Marketed by :

CEMSEAL INDUSTRIES LTD.

UNIT ADDRESS

☒ C-1/B-97 G.I.D.C Industrial
Estate, Kalol, Panchmahals,
Gujarat - 389330

☒ Plot no 30, Marble market
Sejbahar, Raipur,
Chhattisgarh - 492015

www.cemseal.net | info@cemseal.net

Contact no. : 90 99 266 166



...Building on over 200 years' experience



...Building on over 200 years' experience

“
Protecting
your Dreams
since decades

ISO 9001:2015 CERTIFIED

PRODUCT CATALOGUE

PLASTICIZERS , WATERPROOFING &
PROJECT PRODUCTS

ABOUT US

Cemseal Industries Limited is a company established with an object of manufacturing and dealing in Construction Chemicals. The Company has begun with a clear focus on its goal, mission and core values with an aim to be a serious long term player in the field of Construction Chemicals. The Company's plants are located at Plot No. C1/B 96-97, GIDC Industrial Estate, Kalol, Panchmahals : 389 330 & Plot 30, Marbel Market, Sejbahar, Raipur : 492015. It is engaged in manufacturing various types of Construction Chemicals in liquid as well as powder forms. The Company's product portfolio of over 50 products comprises various Admixtures, Tile Adhesives & Grouts, Waterproofing Chemicals, Wall Putty, Protective Coatings, Block Jointing mortar and Foundation Chemicals.

The Company has acquired 'CEMSEAL' brand and other trade names from Cementone (India) Ltd. together with the technology for manufacturing Construction Chemicals. Cementone (India) Ltd. had earlier acquired such technology from Cementone Ltd. (U.K.) and Bever Ltd. (U.K.). The process and technology developed by U. K. companies have been proven for over 200 years which gives an edge in developing market for its products. The Company has therefore adopted a punch line – "Building on over 200 years' experience"

VISION

To continuously grow by serving the needs for strong, safe and sustainable infrastructure.

MISSION

To inspire development of the best civil construction, & offer high quality products for achieving the same.

People – the Real Assets

- We will build a team of motivated people and will be known by such Team
- We will respect our people, motivate them to perform better, reward their contribution and promote their well-being

Customers' Happiness

- We will establish a distribution network that helps improving lives of our customers

Stakeholders – our Partners

- We will respect the interests of our stakeholders and be responsive to them

CORE VALUES

Best Delivery

- We will always offer outstanding products and support services

Social Cause

- We will be good citizens and fulfil our social responsibilities

CONFLO

BENEFITS

- Reduces water cement ratio.
- Improves strength and work ability.
- Enables early removal of shutter.
- Reduces honey combing in concrete.
- Increases the flow and compaction in reinforcement.
- Provides high early strength of concrete.
- Improves integral waterproofing quality.

APPLICATIONS

Plasticizer for concrete and plaster, beam, column, slab, staircase, water tank, basement, floor and for other cement concrete work

HOW TO APPLY?

Add 200 ml per 50 KG cement and mix well for any kind of concrete.

DOSAGE

200 ml per 50 KG cement

PACKING

KG: 1,5,10,20,50,250



CEMPROOF WP+

BENEFITS

- Provides high strength and plasticity.
- Reduces honey combing and concrete leakages.
- Integral waterproofing solution for any type of cement work.

APPLICATIONS

Integral waterproofing compound for concrete, plaster, column, slab, staircase, water tank, basement, floor, sunk slab, terrace and any other concrete work.

HOW TO APPLY?


Add 200 ml per 50 KG cement and mix well for any kind of concrete.

DOSAGE

200 ml per 50 KG cement

PACKING

ML: 200, 500 | LTR: 1,5,10,20,50,210

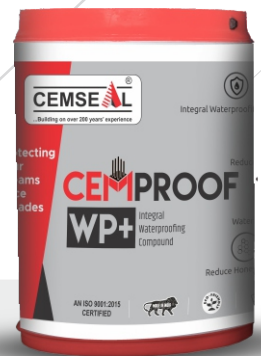

SBR - SUPER LATEX



BENEFITS

- Brushable and easy to apply for waterproofing.
- Can be used as a waterproof coat.
- Stops water leakages quickly from terrace, water tank, sunk slab etc.

APPLICATIONS

Best for waterproofing. All concrete slabs, water tank, cement sheets, terrace, repairing of old RCC structures, old and new concrete joints, toilet, bathroom, sunk slab, filling of hairline cracks, plastering RCC structure without making grooves.

HOW TO APPLY?

Add 1 litre SBR for 2.5 litres of water and 5 KG of cement. Use brush to spread the SBR as coating.


DOSAGE

For waterproofing:
5 KG cement: 2.5 litres water: 1 litre SBR
For repairing:
10% cement weight

PACKING

ML: 200, 500
LTR: 1,5,10,20, 50,210

CRP

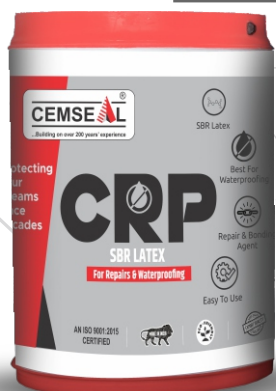

BENEFITS

- SBR Latex for waterproofing.
- Brushable and easy to apply for waterproofing.
- Can be used as a waterproof coat.
- Stops water leakages from terrace, water tank, sunk slab etc.

APPLICATIONS

All concrete slabs, water tank, cement sheets, terrace, repairing of old RCC structures, old and new concrete joints, toilet, bathroom, sunk slab, filling of hairline cracks, plastering RCC structure without making grooves.

HOW TO APPLY?

For Slurry Coat:
Add 1 litre CRP in 1.5 KG of Cement
For regular waterproofing:
Add 1.5 litres CRP & 2 litres water in 5 KG of cement

DOSAGE

For waterproofing:
5 KG cement: 2 litres water: 1.5 litre CRP
For repairing:
10% of cement weight

PACKING

ML: 200, 500
LTR: 1,5,10, 20,50,210

CEMCRETE

BENEFITS

- For Acrylic Polymer based waterproofing.
- Brushable and easy to apply for waterproofing.
- Can be used as a waterproof coat.
- Restrains UV rays & direct sunlight.
- Stops water leakages from terrace, water tank, sunk slab etc.

APPLICATIONS

All concrete slabs, water tank, cement sheets, terrace, repairing of old RCC structures, old and new concrete joints, toilet, bathroom, sunk slab, filling of hairline cracks, plastering RCC structure without making grooves.



HOW TO APPLY?

For Waterproofing Slurry Coat:
Add 1 litre Cemseal Cemcrete in 2 KG of Cement

DOSAGE

For waterproofing:
Add 1 litre Cemcrete in 2 KG of Cement

PACKING

ML: 200, 500
LTR: 1,5,10,20,50,210

CEMFIN 2K

BENEFITS

- 2 part elastomeric coating that resists water ingress.
- Excellent waterproofing property.
- Dries quickly.
- Flexible and non-toxic.
- Excellent Adhesion.
- Can be applied on wet (damp) surface.

APPLICATIONS

Basement walls, lift pits, sunk slabs, swimming pool, water tanks, bathroom, toilet, kitchen, balconies and any other cement-concrete surface where waterproofing is required.



HOW TO APPLY?

Using brush or trowel.
MUST NOT dilute with water.

PACKING

KG: 3 & 15

DOSAGE/COVERAGE

Mix the content provided in the packing. Apply second coat after at least 1 hour of first coat curing. 1 KG of Cemfin 2K will cover 10 sq ft for one coat.

CEMPLAST



BENEFITS

- Gives ease of working by improved plasticity with consequent increased productivity
- With Cemplast the Mortar will not bleed or segregate thereby achieving cohesiveness
- Shrinkage, Cracking and crazing is minimized
- Inbuilt bonding aids reduce rebound losses
- Cemplast cuts labor costs reduces cement consumption and wastage, hereby providing economical benefits
- Improves mortar Durability

APPLICATIONS

Plasticizer for Cement Plaster that helps in better Coverage, Workability, and ease of use while plastering brick, mortar & AAC block.

HOW TO APPLY?

1 liter of Cemplast added to a 200 liter drum of gauging water will be sufficient for gauging approximately 4x50 kg bags of cement to produce renders or bricklaying mortar.

PACKING

LTR :1, 5, 10,
20, 210

BLOCK JOINTING MORTAR



BENEFITS

- Thin joints - Only 2-3 mm joint is sufficient for jointing of two blocks.
- Less quantity - Quantity required is 75% less than the conventional mortar.
- Time saving - No site mixing required for various raw materials and overall less material required in application process.
- Easy application - Easy to mix, blend and apply due to the smooth texture of the mortar .
- Water saver • Eco friendly.

APPLICATIONS

Cemseal block jointing mortar is a superior water resistance cement based mortar, specially formulated for joining blocks.

PACKING

KG : 20, 40

COVERAGE

Considering Joint thickness of 2-3 mm

SUPER PLASTICIZER

BENEFITS

- Reduces water cement ratio.
- Improves strength and work ability.
- Increases the flow and compaction in reinforcement.
- Reduces honey combing in concrete.
- Provides high early strength of concrete.

APPLICATIONS

Super plasticizer for concrete work - beam, column, slab, staircase, water tank, basement, floor and for other cement concrete work. Mainly used in Ready Mix Concrete plant (RMC Plant).



DOSAGE

Dosage rates vary depending upon the amount of plasticity and /or water reduction desired. Recommended dosage range from 0.80 to 2.5 liters per 100 kg of total cementitious material. Other dosages may be recommended in special cases according to the specific site conditions. It is highly recommended that trial mixes be prepared to determine the optimum dosage for your specific performance requirements.

STORAGE

Up to 1 year in unopened original packing, protected from extremes of heat and cold and stored under shade.

PACKING

KG :250

Super Plasticiser is compatible with all types of cements and cement replacements, such as Microsilica, Fly ash and GGBS.

HOW TO APPLY?

Super Plasticiser is a ready to use liquid admixture to be added to the concrete as a separate component. Super Plasticiser is poured into the concrete mix right after the addition of at least 80% of mixing water, when all materials are wetted. Avoid adding the admixture to the dry aggregates.

PRECAUTIONS

Super Plasticiser is not a fire or health hazard. Spillages should be washed down immediately with cold water. For further information refer to the Material Safety Data Sheet.

COMPARISON OF

PRODUCT	CONFLO	NLSS	SPN-101	SPNR-101	SPLP-101
Sp. Gravity	1.17	1.17	1.2	1.2	1.05
Solid Contant	40	40	40	40	16
Appearance	DARK BROWN	DARK BROWN	DARK BROWN	DARK BROWN	LIGHT BROWN
Type	PLASTICIZER	PLASTICIZER	PLASTICIZER	RETARDER	RETARDER
Base	LIGNO	LIGNO	NAPTHA	MODIFIED NAPTHA	PCE
Use Up To	M40	M40	M40	M40	M40
Ideal Dosage	1%	1%	1%	1%	1%
Max. Dosage	1.50%	1.50%	1.50%	1.50%	1.50%
Initial Slump (As Per Below Design @38 C & 22 % Humidity)	180	180	160	180	190

DESIGN MIX (M40)

CEMENT OPC 53	FLY ASH	20 MM	10 MM	SAND	WATER
5.18	1.29	8.68	6.08	10.44	2.45

SUPER PLASTICIZER

SPMP-101	SPMP-102	SPMN-101	SPMN-102	SPHP-101	SPPP-101
1.07	1.07	1.1	1.1	1.15	1.15
22	22	25	32	35	37
LIGHT BROWN	LIGHT BROWN	BROWN	BROWN	BROWN	BROWN
RETARDER	RETARDER	RETARDER	RETARDER	RETARDER	RETARDER
PCE	PCE	PCE	PCE	PCE	PCE
M45	M50	M45	M50	M55	M60
0.90%	0.70%	0.90%	0.70%	0.50%	0.35%
1.50%	1.50%	1.50%	1.50%	1.50%	1.50%
180	200	180	200	200	200


NOTE :

- These are just the sample products, Customization would be done as per the need on site.

POLY CEMENT

DESCRIPTION

- It is a Polymer based Portland Cement, manufactured with the highest quality raw materials and added polymers
- It has dual virtues of superior comprehensive strength and aesthetics.



APPLICATIONS

It can be used for decorative, Structural and architectural applications such as mortar, plaster, concrete, flooring surface.

It can be used in waterproofing because of enhanced polymers.

PACKING
KG: 1, 5

COLOUR
Grey | White

Polymer based cement gives higher compressive strength, flexibility, durability and best in class waterproofing adhesion in structure and joints

MAGIC CLEANER

BENEFITS

- Cleans steel taps, faucets, sinks, fixtures, glass, ceramic and tiles by removing stains, rust, calcium, limescale and dirt.
- Makes the item shine.

APPLICATIONS

All in 1 product for cleaning metal, steel, ceramic items, sinks, fixtures, glass and tiles.

Note: Magic Cleaner is an Eco Friendly does not harm skin anyway.

HOW TO APPLY?

Spray, Scrub, Wait for 2 minutes, clean & rinse. Clean again with warm water and cloth for best results.

DOSAGE

Depending on the need.

PACKING

ML : 200, 500 LTR : 5, 20



PROJECT & INDUSTRY PRODUCTS

CEMGROUT NS

- Non shrink cementitious precision foundation grout and rebarring agent.

FLOOR HARDENER

- Hardener for cementitious floor. Can be used for floors of Factories, Godowns, Shopping malls, Museums, beaches etc.

CONSPEED

APPLICATIONS

Any concrete and paver blocks.

BENEFITS

- Reduces water cement ratio,
- Improves setting time.
- Provides high early strength of concrete.
- Accelerator and hardener for paver blocks and cement concrete work.

PACKING

KG: 50,250

HOW TO APPLY?

Add 200 to 500 ml per 50 KG cement and mix well for any kind of concrete depending on the need.

DOSAGE

200 ml to 500 ml / 50 KG cement

LACQUER - SB

- Paver Shiner

LACQUER - WB

- Water based lacquer as paver shiner. A special non-toxic ecofriendly water based lacquer for high durability.

CEMCURE EB 286

- Silica based curing compound. Cures concrete/ plaster without water.

CEMCURE EB 559

- Wax based curing compound. Cures concrete/ plaster without water.

CEMSEAL MRA

- Mould Release Agent for any concrete mould. Mainly used for deshuttering.